


GH

5/8" MOUNTING BOLTS A325 (4)

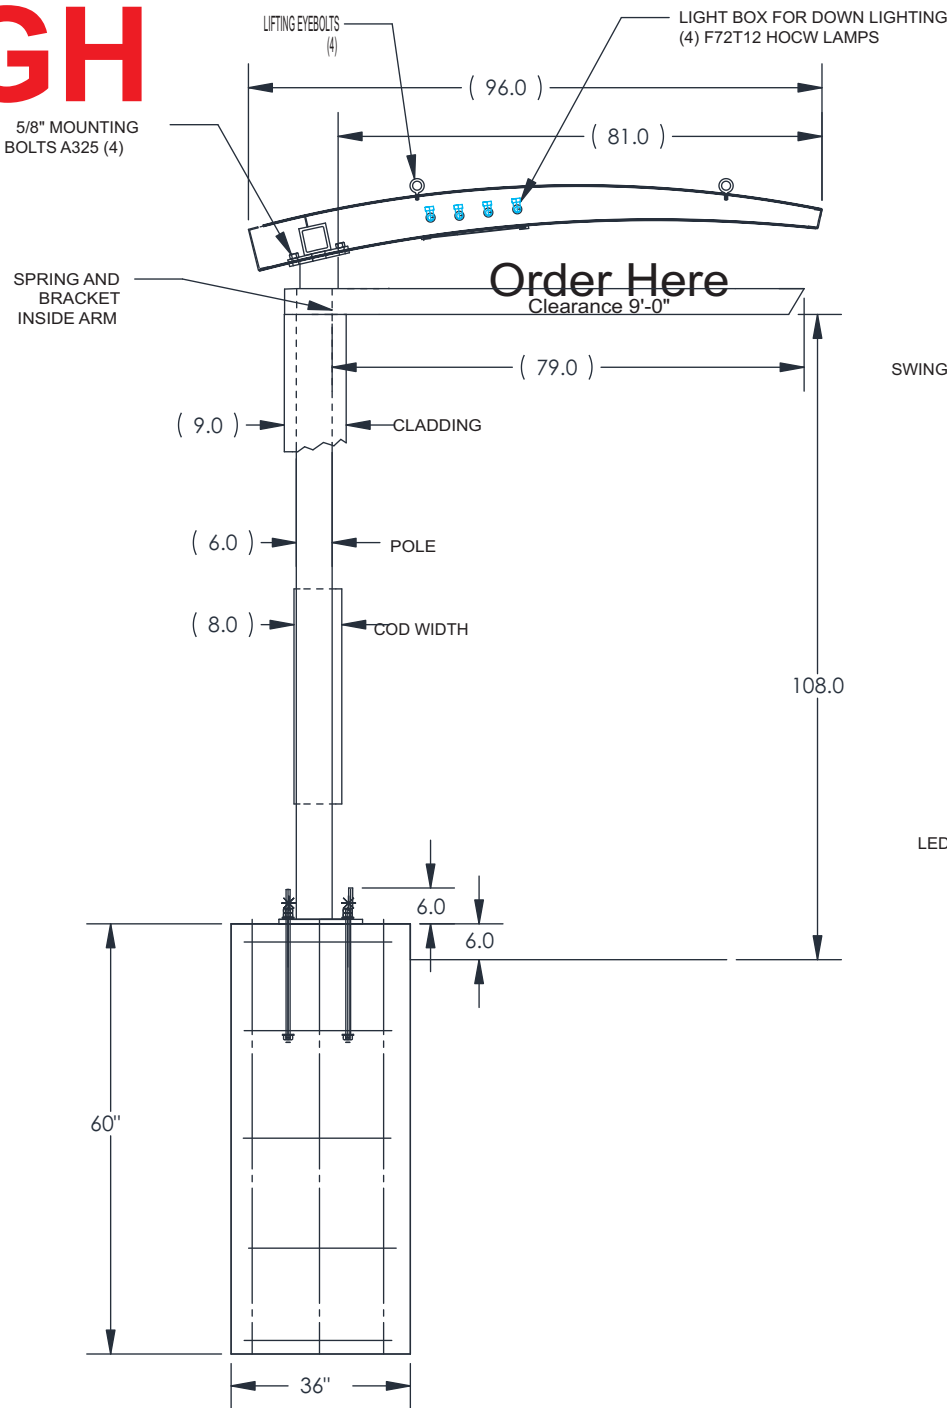


AUGER TYPE FOOTING
USE SIX #5 VERTICAL BARS
WITH #3 TIE BARS 12" ON CENTER

ELECTRICAL NOTES ILLUMINATED CABINETS

- Primary wire size - #12 THWN
- Disconnect switch - at base of sign, 20 amp single pole, timeclock at panel room
- Maximum load - 16 amps 120 volts per circuit maximum circuit size 20 amps per NEC 600-6A
- Ballast - Universal H.O. or equiv.
- Lamps - G.E. High output daylight or equiv. sizes vary with cabinet dimensions
- Sockets - Kulka 5843 H.O. or equiv.
- Conduit - minimum 1/2"
- Total sign load - 3.64 amps 120 volts
- Total sign circuits - 1
- All components shall be U.L. approved, and sign unit complete shall have a UL listing sticker.
- Ballasts shall have independent U.L. approval (fused where required)
- All installations shall be in compliance with N.E.C. and state, county, or local codes
- All signs shall be bonded to building equipment bonding conductor per N.E.C. 250

WIND LOAD CRITERIA: 2010 F.B.C., 160 MPH Ultimate wind speed - exposure "D" Risk Category 1 Per ASCE 7-10. All fasteners and other metal in contact with aluminum shall be stainless steel or hot dip galv.

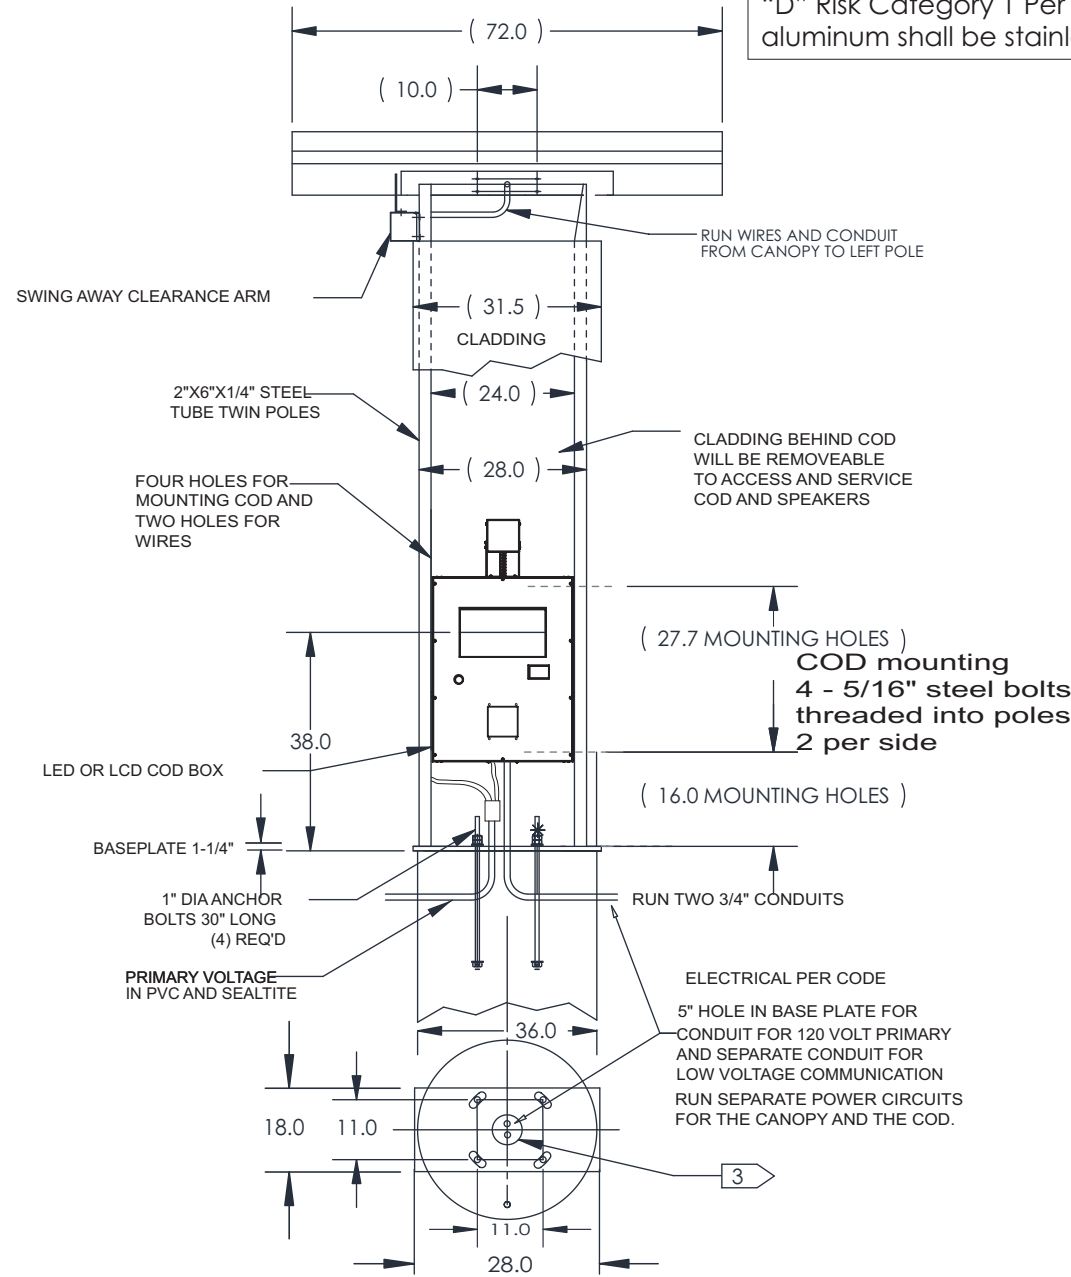


- INSTALLER INSTRUCTIONS:**
1. STAKE FOUNDATION AREA AND CONFIRM FINAL GRADE REQUIREMENTS WITH G. C.
 2. EXCAVATE FOUNDATION AREA.
 3. INSTALL CONDUIT STUB AND ANCHOR BOLTS AND POUR CONCRETE (PRIMARY ELECTRICAL SERVICE TO BASE BY G. C.) NOTE: COMBINED CONDUIT SHOULD NOT EXCEED 5 INCHES IN DIAMETER.
 4. ALLOW CONCRETE CURE TIME AS REQUIRED
 5. INSTALL POLE ENSURE POLE IS LEVELED.
 6. MOUNT CANOPY ON POLE
 7. INSTALL "ORDER HERE" ARM TO POLE, LEVEL.
 8. MAKE FINAL ELECTRICAL HOOK UP TO PRIMARY IN WEATHER PROOF JUNCTION BOX SUPPLIED BY INSTALLER (ALL ELECTRICAL TO MEET ALL LOCAL CODES.
 9. IF THERE IS A COD, MAKE ELECTRICAL AND POS CONNECTIONS.
 10. ATTACH CLADDING TO POLE PER INSTRUCTIONS WITH CLADDING.
 11. NOTE: POLE SUPPLIED WITH POWDER-COAT PAINTED FINISH. INSTALLER TO PERFORM TOUCH-UP PAINTING AS REQUIRED. PAINT WILL BE SHIPPED WITH THE POLE FOR THIS PURPOSE.
 12. TEST LIGHT CANOPY AND TOUCH UP FRAME AS NEEDED.
 13. REMOVE LIFTING BOLTS AND REINSTALL HEX BOLTS.
 14. CLEAN UP AREA AND REMOVE ANY PACKING MAT'L.

DESIGN NOTES:

- 1.) ALL CONCRETE EXCEPT CONCRETE USED FOR BACK FILL SHALL DEVELOP A MINIMUM COMPRESSIVE STRENGTH OF 3000 P.S.I.
- 2.) CONCRETE BASE DESIGNED USING GOOD TO AVERAGE SOILS HAVING AN ALLOWABLE BEARING CAPACITY OF 200 P.S.F./FT.
- 3.) ALL FOOTING EXCAVATIONS ARE TO BE FREE OF WATER AND FOREIGN MATTER BEFORE PLACING CONCRETE.
- 4.) IF THESE CONDITIONS DO NOT EXIST, A NEW BASE MUST BE DESIGNED BY A LICENSED STRUCTURAL ENGINEER.

ELECTRICAL DATA:

LINELOAD: 3.64 AMPS (1) 20 AMP 120 VOLT CIRCUIT
ENCLOSED BALLAST FULHAM WORKHORSE 7
LAMPS: F72T12 CW/HO (4) REQ'D

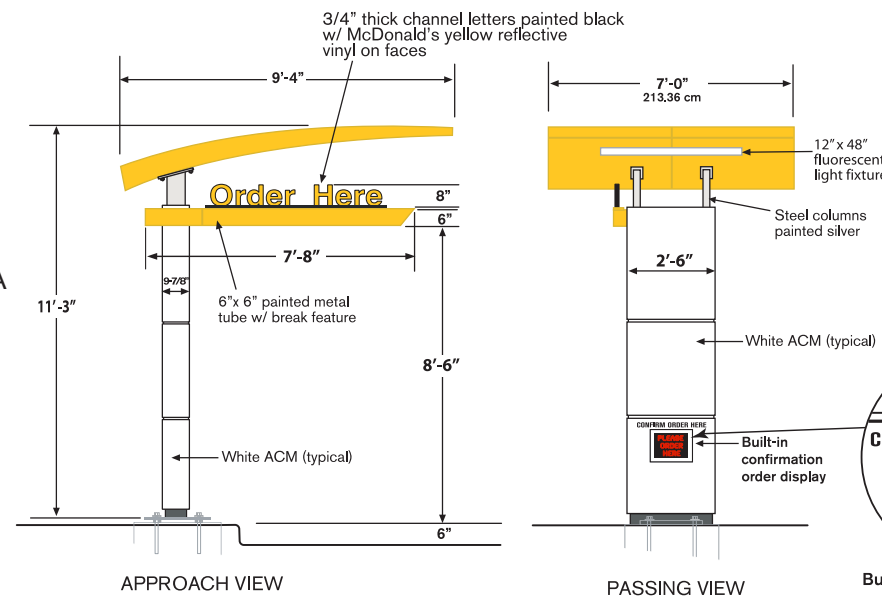

Illumination: 4 - F72T12 CW/HO


Electrical: 15 Amp 120 Volt

Ballast: Fulham Workhorse 7

Ship Weight: 1300 lbs.

- Other:**
- Available with LED or LCD COD.
 - Spring loaded swing away 9' clearance arm

Illuminated awning provides a customer safe environment at night and protection from inclement weather



McDonald's

Regency Lakes
6440 N. State Road 7
Coconut Creek, FL 33073

Kemp Signs inc.

1767 Hill Ave.
West Palm Beach, Fl. 33407
561-840-6382 fax 561-840-6385

ALBERT A. GARGIULO, P.E.

CONSULTING ENGINEER

Lic. No. PE 32582

324 SUNSET RD. WEST PALM BEACH, FL. 33401

561-686-5554