


Bollard

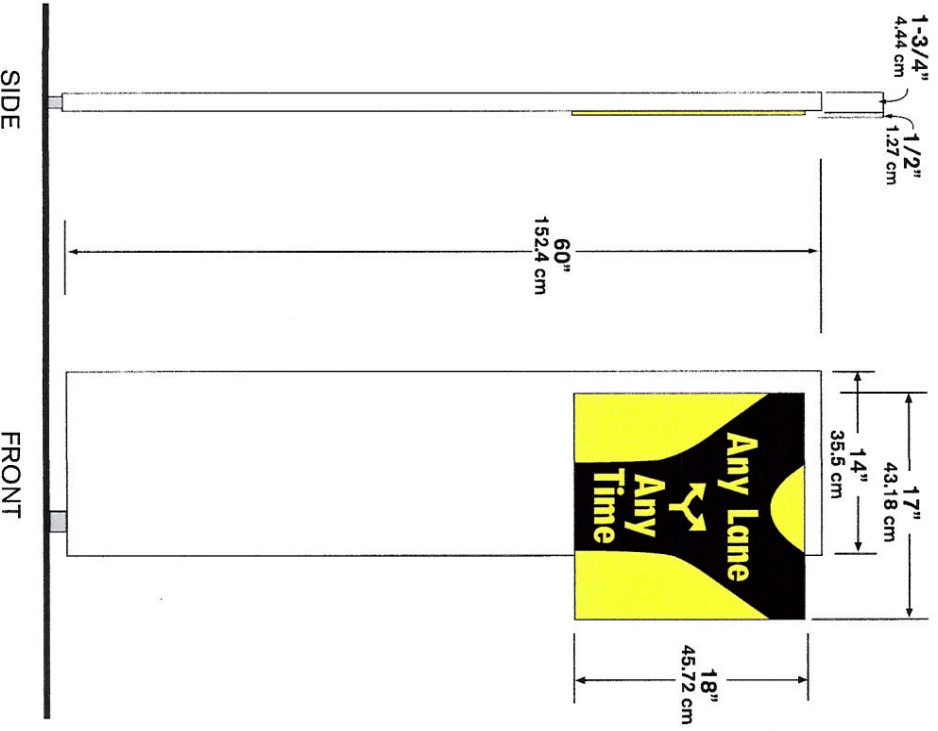

Illumination:


N/A

Ship Weight:

26 lbs.


Other:

- PMS 109 yellow reflective message panel with black decal graphics/letters
- Two mounting systems available; direct burial or anchor bolt.

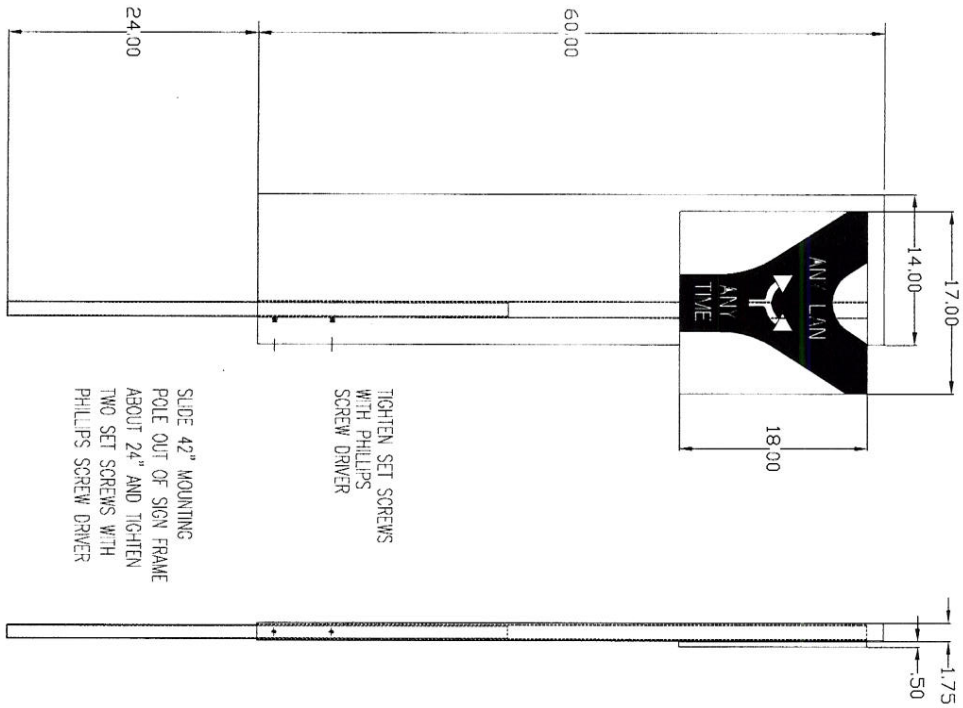

TIGHTEN SET SCREWS
WITH PHILLIPS
SCREW DRIVER

SLIDE 42" MOUNTING
POLE OUT OF SIGN FRAME
ABOUT 24" AND TIGHTEN
TWO SET SCREWS WITH
PHILLIPS SCREW DRIVER

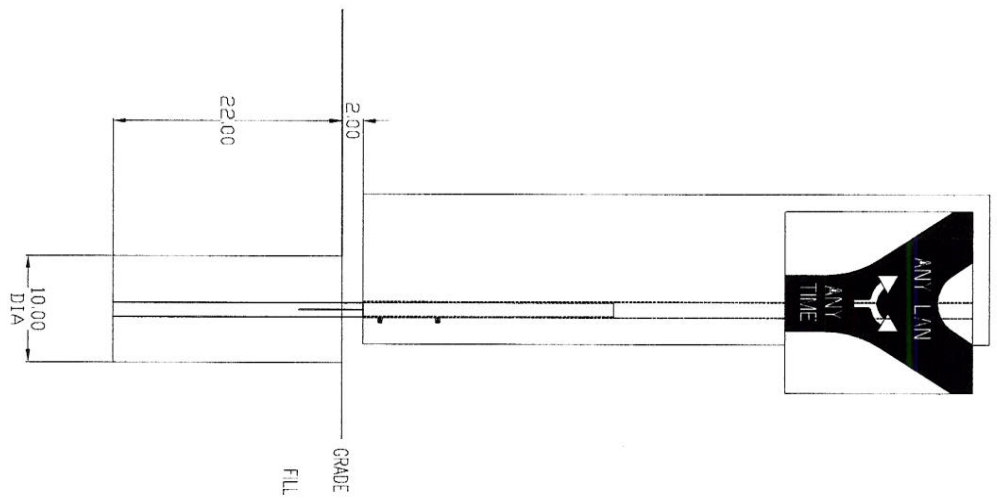

FILL HOLE WITH APPROXIMATELY 1 CU. FT. CONCRETE - 3500 PSI

SGN WEIGHT: 26 POUNDS

- INSTALL INSTRUCTIONS**
1. SLIDE OUT POLE 24" FROM THE SIGN BY LOOSENING THE TWO SET SCREWS WITH PHILLIPS SCREWDRIVER AND THEN TIGHTENING.
 2. DIG FOUNDATION HOLE TO 22" DEPTH.
 3. FILL THE HOLE WITH CONCRETE AND SET IN THE SIGN AND KEEP LEVEL UNTIL CONCRETE SETS.

REV	DESCRIPTION	DATE	BY	CHK
A	REVISED	12/07/10	CLR	
SM	DESIGNER			
	DESIGN REVIEW			

These drawings are the
exclusive property of Everbrite, Inc.
Use of, or duplication in any manner
without express written permission
of Everbrite, Inc. is prohibited.

THE		MCDONALD'S BOLLARD SIGN W POLE MOUNTING		REV
DATE	BY	SCALE	DRAWN BY	A
8/10/10	BT	NONE	IN49487S	
EVERBRITE INC.				