

CIMARRON LED

Cat.#

Job

Type



Approvals

SPECIFICATIONS

Construction:

- Stylish vertically finned die-cast solid top housing for maximum heat dissipation; Stops collection of unsightly debris from gathering on top of the housing
- Rugged lower die-cast aluminum heat sink accelerates thermal management and optimizes PCB and optical performance
- Separate optical and electrical compartment for optimum component operation
- One piece die cut silicone gasket ensures weather proof seal around each individual LED for IP65 rating
- Backlight Control (BC) option available for 85% spill light reduction, doesn't change fixture appearance or EPA, recommended for Type III and Type IV distributions
- Stamped bezel provides mechanical compression to seal the optical assembly
- Complements the Hubbell Southwest series of outdoor fixtures
- Weight - 45.0 pounds, EPA - 1.3 ft²
- Suitable for applications requiring 3G testing prescribed by ANSI C136.31

Optics:

- Choice of 72 high brightness LED configurations with individual acrylic lenses specially designed for IES Type II, III, IV and V distributions
- Auto optics designed for front row 1A and interior rows 2A (see distribution under ordering and page 2)
- CCT: 3000K (80 CRI), 4000K (70 CRI), 5000K (70 CRI), and turtle friendly Amber LED options

Electrical:

- Universal input voltage 120-277 VAC, 50/60 Hz
- Integral step-down transformer for 347V & 480V
- Ambient operating temperature -40° C to 40° C
- Automatic thermal self-protection
- Drivers have greater than 90% power factor and less than 10% THD
- Optional continuous dimming to 10% or dual circuitry available

- LED drivers have output power over-voltage, over-current protection and short circuit protection with auto recovery
- 1050 mA driver available with 90L configuration for increased lumen output
- LED electrical assembly, including PR devices, consumes no power in the 'off' state
- Surge protection – 20KA; Turns fixture off at end of life; Includes LED for end of life indication (see surge suppressor page 4)

Controls:

- Drivers are 0-10V dimming standard. Photocell, occupancy sensor and wireless controls available for complete on/off and dimming control

Lumen maintenance:

- L90 at 60,000 hours (Projected per IESNA TM-21-11)

Installation:

- Two die-cast aluminum arm designs: The decorative arm offers a sleek upswept look while the straight arm follows the housing's contoured lines for continuity of style

- Fixture ships with arm installed for ease of installation and mounts to #2 drill pattern

- Wall bracket, mast arm fitter and pole accessories are also available allowing easy mounting for virtually any application

Finish:

- TGIC thermoset polyester powder paint finish applied at nominal 2.5 mil thickness

Warranty:

Five year limited warranty (for more information visit: <http://www.hubbelloutdoor.com/resources/warranty/>)

Listings:

- Listed to UL1598 and CSA C22.2#250.0-24 for wet locations
- Models meet DesignLights Consortium (DLC) qualifications, consult DLC website for more details: <http://www.designlights.org/QPL>
- IDA approved • IP65

PRODUCT IMAGE(S)



90 LED 3/4 VIEW



30 LED






60 LED



90 LED

DIMENSIONS

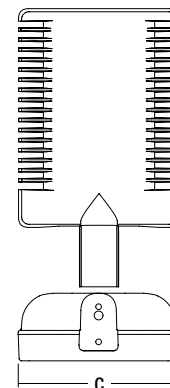

A	B	C	D	E	F	G
6 3/4"	21 3/4"	16"	6 5/8"	6 5/16"	5 5/8"	6 1/8"
171mm	552mm	406mm	168mm	160mm	143mm	155mm

CERTIFICATIONS/LISTINGS



ORDERING INFORMATION SEE NEXT PAGE




Spaulding Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • Phone: 864-678-1000
Due to our continued efforts to improve our products, product specifications are subject to change without notice.



© 2015 SPAULDING LIGHTING, All Rights Reserved • For more information visit our website: www.spauldinglighting.com • Printed in USA CL1LED-SPEC 11/15

ORDERING INFORMATION ORDERING EXAMPLE: CL1-A-90LU-5K-3-DB-RPA3



SERIES	NO. OF LEDS	VOLTAGE	CCT	DRIVE CURRENT	OPTIONS
CL1 Cimarron LED	90L 90 High brightness LEDs 60L 60 High brightness LEDs 30L 30 High brightness LEDs	U³ Universal 120V-277V, 50/60 Hz 1 120V 2 208V 3 240V 4 277V 5 480V, 60 Hz F 347V, 60 Hz E⁴ 220V, 50 Hz	3K 3000K 4K 4000K 5K 5000K AM⁷ Amber (590 nm available for "Turtle Friendly" applications (consult factory))	Leave blank for 700mA (standard) 035 350mA Amber CCT only 105 1050 mA (use with 90L only for higher lumen output)	BC⁶ Backlight control CD² Continuous dimming WB Wall bracket RPA3 3" Round pole adapter RPA4 4" Round pole adapter RPA5 5" Round pole adapter RPA6 6" Round pole adapter F(X)^{3,4} Fusing (replace X with voltage: 1-120V, 2-208V, 3-240V, 4-277V, 5-480V, F-347V)

MOUNTING

- A** Arm mount construction (6" straight rigid arm included & acceptable for 90° configurations)
- AD** Decorative arm mount const. (6" decorative upswept arm incl. & acceptable for 90° configurations)
- MAF** Mast arm fitter for mounting to standard 2 3/8" mast arm bracket, includes 6" straight rigid arm

DISTRIBUTION

- 2** Type II
- 3** Type III
- 4** Type IV
- 5M** Type V Medium
- 5S** Type V Short
- 5W** Type V Wide
- 2L** Type II Rotated 90° left
- 3L** Type III Rotated 90° left
- 4L** Type IV Rotated 90° left
- 2R** Type II Rotated 90° right
- 3R** Type III Rotated 90° right
- 4R** Type IV Rotated 90° right
- 1A** Auto Front Row Type I
- 1AR** Auto Front Row Type I Rotated 90° right
- 1AL** Auto Front Row Type I Rotated 90° left
- 2A** Auto Front Row Type II
- 2AR** Auto Front Row Type II Rotated 90° right
- 2AL** Auto Front Row Type II Rotated 90° left

COLOR

- DB** Dark Bronze
- BL** Black
- WH** White
- GR** Gray
- PS** Platinum Silver
- RD** Red (premium color)
- FG** Forest Green (premium color)
- CC** Custom Color

- VG** Vandal guard
- 7PR** Photocell receptacle (7-pin ANSI C136.41—2013 receptacle for use with standard Twist-Lock® photo controls, shorting caps, and ANSI C136.41 external wireless control devices. Select SCL option to add occupancy sensing capability when using with compatible external wireless devices.

PIR MOTION/OCCUPANCY CONTROL OPTIONS

- SCO^{10,12,13}** On/Off control (line voltage device not for use with 7PR receptacle option and external wireless control devices)
- SCL^{10,12,13}** Add-on occupancy sensor for use with ext. wireless control device connected thru 7PR receptacle. Consult control manufacturer for compatibility.
- SCP^{8,10,12,13}** Programmable dimming control (line voltage device not for use with 7PR receptacle option and external wireless control devices). A minimum of one SCP-REMOTE accessory remote control required for configuration; (Standard lens with greater sensitivity; motion detection radius equal to .75' X luminaire mounting height (approx. distance))
- SCPW^{8,10,12,13}** Programmable dimming control (line voltage device not for use with 7PR receptacle option and external wireless control devices); A minimum of one SCP-REMOTE accessory remote control required for configuration. (Wide lens with motion detection radius equal to 1.3 X luminaire mounting height (approx. distance))

WIRELESS CONTROL OPTIONS

- WIR^{11,14}** wiSCAPE Fixture Module, in-fixture relay for wireless lighting control
- WIRSC^{10,12,14}** wiSCAPE Fixture Module, in-fixture relay for wireless lighting control and motion/occupancy control
- TCM^{12,13,14}** TOTUS Control Module, T-Net wireless lighting control from TOTUS

- Notes: 1- For BL option 90L and 60L; N/A 347V & 480V
 2- BL & CD cannot be combined
 3- Fuse option not available with universal voltage
 4- Select F3 fusing option for 220V
 5- Photocell receptacle not available with BL option
 6- Recommended for Type III and IV distributions only
 7- Available in 350mA drive current only Type IV, 5M
 8- 0-10V fully adjustable dimming with automatic daylight calibration and different time delay settings, must order minimum of one SCP-REMOTE control to program dimming settings (see accessories)
 9- Must specify 120V, 208V, 240V or 277V; not available with PR option; consult factory for 347V and 480V application, not available with BL or CD options.
 10 - Not available with AD arm
 11 - Not available with 480V
 12 - Not available with 347V or 480V
 13 - Not available with WIR or WIRSC
 14 - Not available with SCO, SCL, SCP or SCPW

CONTROLS GUIDE

As energy codes become more restrictive and we push for sustainable lighting designs, the integration of lighting controls and luminaires have become more and more important. Hubbell Lighting offers numerous outdoor lighting controls solutions for the most demanding applications. Visit the link below to learn more about energy-saving controls.

www.hubbellighting.com/solutions/controls/



ENERGY SAVING DATA

#LEDS	DRIVE CURRENT	SYSTEM WATTS		DIST. TYPE	5K (5000K nominal, 70 CRI)					4K (4000K nominal, 70 CRI)					Amber (590)							
					LUMENS	LPW ¹	B	U	G	LUMENS	LPW ¹	B	U	G	LUMENS	LPW ¹	B	U	G			
																				120-277V	347-480V	
30		70W	80W	1A	8244	118	1	0	1	8162	117	1	0	1	—	—	—	—				
				2A	8202	117	1	0	1	8121	116	1	0	1	—	—	—	—				
				2	7715	110	2	0	3	7639	109	2	0	2	—	—	—	—				
				3	7712	110	2	0	2	7635	109	2	0	2	—	—	—	—				
				4	7803	111	1	0	2	7726	110	1	0	2	—	—	—	—				
				5S	8374	120	3	0	0	8291	118	3	0	0	—	—	—	—				
				5M	7940	113	3	0	1	7862	112	3	0	1	—	—	—	—				
				5W	7667	110	3	0	2	7591	108	3	0	2	—	—	—	—				
				60	700 mA	135W	150W	1A	16171	120	1	0	2	16011	119	1	0	1	—	—	—	—
								2A	16088	119	1	0	2	15929	118	1	0	2	—	—	—	—
2	15134	112	3					0	3	14984	111	3	0	3	—	—	—	—				
3	15127	112	3					0	3	14977	111	3	0	3	—	—	—	—				
4	15306	113	2					0	3	15154	112	2	0	3	2488	51	0	0	1			
5S	16426	122	4					0	0	16263	120	4	0	0	—	—	—	—				
5M	15575	115	4					0	2	15421	114	4	0	2	2533	51	2	0	1			
5W	15040	111	4					0	3	14891	110	4	0	3	—	—	—	—				
90		205W	225W					1A	23781	116	2	0	2	23546	115	2	0	2	—	—	—	—
								2A	23659	115	2	0	2	23425	114	2	0	2	—	—	—	—
				2	22255	109	3	0	4	22035	107	3	0	4	—	—	—	—				
				3	22246	109	3	0	4	22026	107	3	0	4	—	—	—	—				
				4	22509	110	3	0	4	22286	109	3	0	4	3558	76	1	0	1			
				5S	24156	118	5	0	0	23916	117	5	0	0	—	—	—	—				
				5M	22905	112	4	0	2	22678	111	4	0	2	3596	76	2	0	1			
				5W	22117	108	5	0	3	21899	107	5	0	3	—	—	—	—				
				90	1050mA	325W	350W	1A	31708	98	2	0	2	31394	97	2	0	2	—	—	—	—
								2A	31545	97	2	0	2	31233	96	2	0	2	—	—	—	—
2	29674	91	4					0	5	29380	90	3	0	5	—	—	—	—				
3	29661	91	3					0	4	29367	90	3	0	4	—	—	—	—				
4	30011	92	3					0	5	29714	91	3	0	5	—	—	—	—				
5S	32207	99	5					0	0	31888	98	5	0	0	—	—	—	—				
5M	30539	94	5					0	3	30237	93	5	0	3	—	—	—	—				
5W	29490	91	5					0	4	29198	90	5	0	4	—	—	—	—				

ENERGY DATA	
Power Factor	>.9
Total Harmonic Distortion	<10%

AUTOMOTIVE DEALERSHIP OPTICS



For Automotive Dealership applications Spaulding Lighting has developed two optics designed for enhanced and proper lighting of the auto dealership merchandise and the front row 1A and interior rows 2A (See CL1 distribution information for details)

Optic 1A

- Maximum illumination on front row display
- Maximum pole spacing

Optic 2A

- Excellent front row illumination and drive lane
- Optimal uniformity for drive lane and interior rows






ACCESSORIES/REPLACEMENT PARTS - Order Separately

Catalog Number	Description
CR-RPA3-XX ¹	Round pole adapter for straight arm (3/4 - 3/4")
CR-RPA4-XX ¹	Round pole adapter for straight arm (3/8 - 4 1/2")
CR-RPA5-XX ¹	Round pole adapter for straight arm (5")
CR-RPA6-XX ¹	Round pole adapter for straight arm (6")
CRD-RPA2-XX ¹	Round pole adapter for upswept arm (2 3/4 - 3 1/8")
CRD-RPA3-XX ¹	Round pole adapter for upswept arm (3/4 - 3 3/4")
CRD-RPA4-XX ¹	Round pole adapter for upswept arm (3/8 - 4 1/2")
CRD-RPA5-XX ¹	Round pole adapter for upswept arm (5")
CRD-RPA6-XX ¹	Round pole adapter for upswept arm (6")
WB-CR-XX ¹	Wall bracket
TPLB-XX ¹	Twin parallel luminaire bracket
MAF-CL-XX ³	Horizontal mast arm fitter for 2 3/8" OD arm. Mounts to standard 6" arm (ordered with fixture)

Catalog Number	Description
SCP-REMOTE ⁹	Remote control for SCP option. Order at least one per project to program and control.
93052458	20KA surge protection with an end of life LED indicator

1 - Replace XX with color choice, eg.: DB for Dark Bronze 2 -When ordering poles, specify Pole Drill Pattern #2 3 - Fixture must include standard 6" arm

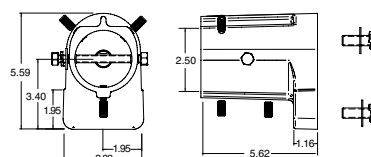

MAF - HORIZONTAL MAST ARM FITTER



MOUNTING ACCESSORIES

Catalog Number	Description
ARM-CL-K-TA-XX ¹	Adjustable mounting arm for single fixture (2-3/8 tenon) – 5 lbs. 2.3 kgs.
ARM-CL-TK-TA-XX ¹	Adjustable mounting arm for two fixtures at 180° (2-3/8 tenon) – 7 lbs. 3.2 kgs.
ARM-CL-K-S-XX ¹	10" adjustable arm – .5 lbs. .05 kgs. – 5.75 lbs. 2.6 kgs.

1 Replace XX with color choice, eg.: DB for Dark Bronze
 2 Fixture must include standard 6" straight arm

ARM-CL-K-TA-XX
 ARM-CL-TK-TA-XX



ARM-CL-K-S-XX



TENON TOP POLE BRACKET ACCESSORIES

(2 3/8" OD tenon) (RSS version requires 4" round pole adapter)

Catalog Number	Description
SETA-XX ¹	Square pole tenon adapter (4 at 90 degrees)
RETA-XX ¹	Round pole tenon adapter (4 at 90 degrees)
TETA-XX ¹	Hexagonal pole tenon adapter (3 at 120 degrees)

1 Replace XX with color choice, eg.: DB for Dark Bronze




PHOTOCONTROL EQUIPMENT

Catalog Number	Description
PTL-1	Photocontrol - twist-lock cell (120V)
PTL-8	Photocontrol - twist-lock cell (120-277V)
PTL-5	Photocontrol - twist-lock cell (480V)
PTL-6	Photocontrol - twist-lock cell (347V)
PSC	Shorting cap - twist-lock

MOTION CONTROLS




- Start up delay from initial motion detection to fixture illumination is approximately 1-2 seconds
- Vehicle detection is possible however less reliable than human detection; Vehicle detection is dependent upon the following: rate of speed, mounting height of luminaire and vehicle temperature

SCP - Designed for intermediate coverage area

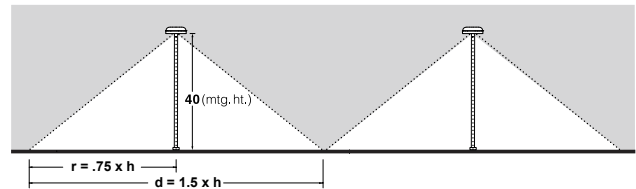

Note: Extreme heat or cold temperatures may limit detection.

SCPW - Designed for widest coverage area

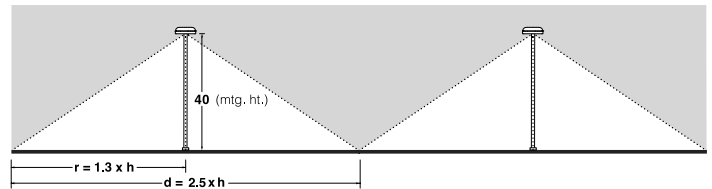

Note: Extreme heat or cold temperatures may limit detection.

SURGE PROTECTION

- Field replaceable surge protection device (SPD) provides 20KA and 10KV protection meeting ANSI/IEEE C62.41.2 Category C High and Surge Location Category C3
- The SPD is designed with a clamping voltage of 1600V at 20KA using industry standard 8/20µs waveform
- Max surge current = 20,000 Amps (see table)
- LED Indicator – Green LED is unlit at end of life

Pulse Rating (8 x 20 µSec)	
Strikes	Surge
1	20,000 A
2	15,000 A
15	10,000 A
120	3,000 A

	cRUus	CE
I _n	10KA	5KA