



WATER DEMAND:
 105 HOTEL ROOMS X 150 gpd/ROOM =
 15,750 gpd

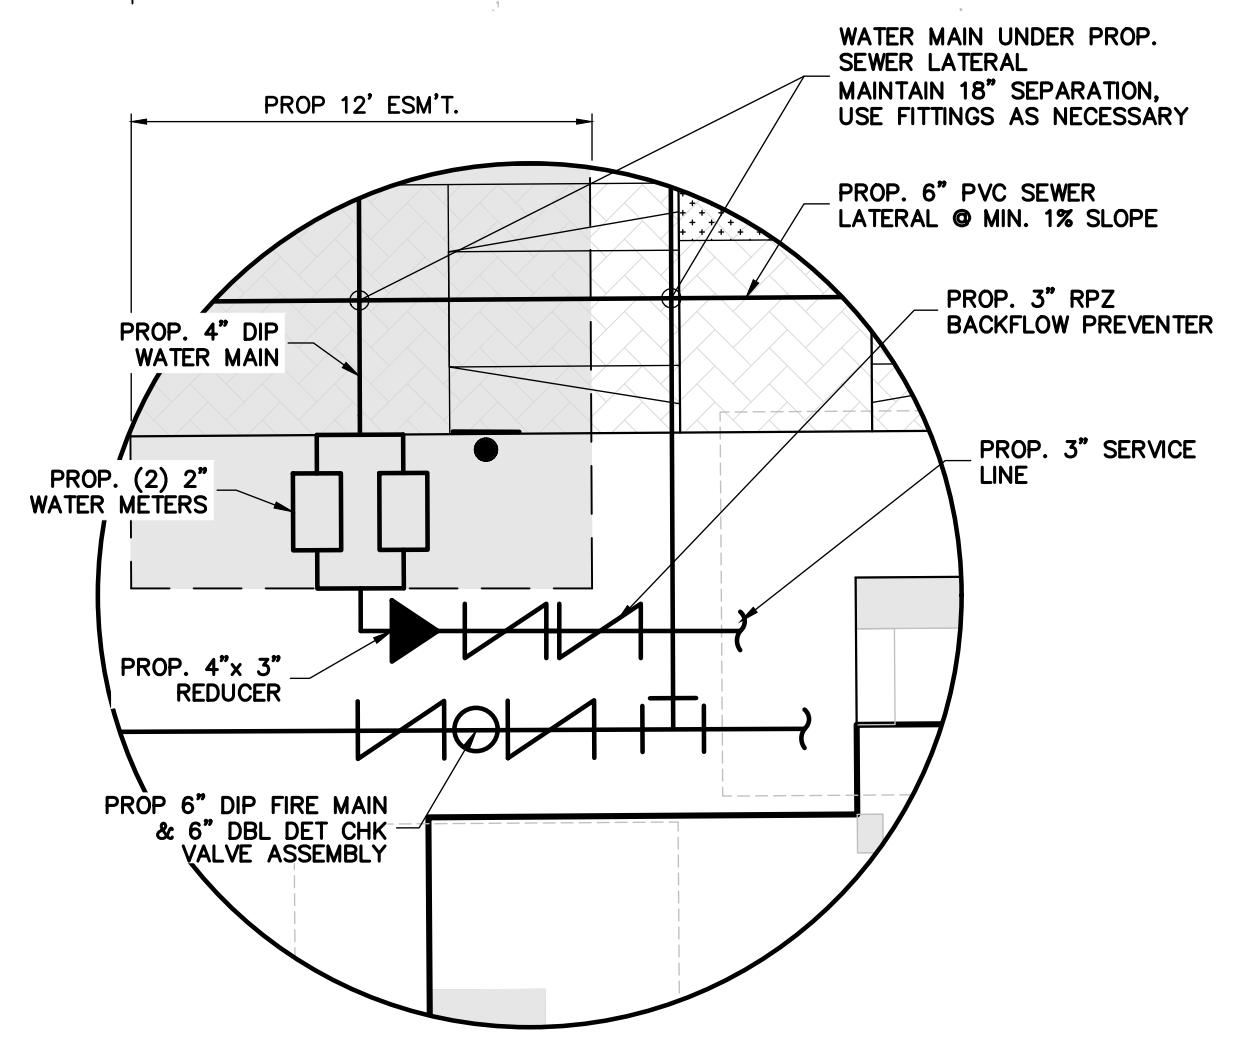

WATER METER SERVICE DETAIL
 NOTE: WATER METER BOXES SHALL BE HS-20
 AND BE SUPPLIED BY CONTRACTOR

NOTE:
 THE CONTRACTOR SHALL VERIFY ALL UNDERGROUND UTILITY LOCATIONS PRIOR TO CONSTRUCTION. THE LOCATIONS OF THE EXISTING UTILITIES SHOWN ON THE PLANS ARE APPROXIMATE ONLY; THE EXACT LOCATIONS SHALL BE DETERMINED BY THE CONTRACTOR PRIOR TO CONSTRUCTION. IN ADDITION, THE CONTRACTOR SHALL BE RESPONSIBLE TO VERIFY IF "OTHER" UTILITIES (NOT SHOWN ON THE PLANS) EXIST WITHIN THE AREA OF CONSTRUCTION. SHOULD THERE BE "OTHER" UTILITIES, THE CONTRACTOR SHALL NOTIFY THE RESPECTIVE UTILITY OWNERS TO RESOLVE UTILITY CONFLICTS AND UTILITY ADJUSTMENTS, AS REQUIRED.

- NOTE:**
1. NO VALVES, METERS, FIRE HYDRANTS, CLEANOUTS, OR OTHER UTILITY APPURTENANCES ARE TO BE PLACED IN, OR ADJACENT TO, SIDEWALKS, CURBS, PARKING SPACES OR OTHER SUCH SITE FEATURES SO AS TO PRESENT A HAZARD OR RESTRICT THE MAINTENANCE OR OPERATION OF THE UTILITY INFRASTRUCTURE.
 2. ALL PROPOSED ELEVATIONS ARE IN N.A.V.D. (88)
 3. ALL VALVES, MANHOLES, CLEAN-OUTS, METER BOXES TO BE ADJUSTED TO GRADE PRIOR TO FINAL LIFT OF ASPHALT/CONCRETE.
 4. MINIMUM COVER ON ALL DIP WATER MAIN SHALL BE 30".
 5. ALL SANITARY SEWER MAINS SHALL BE 8" PVC SDR-26 OR APPROVED EQUAL.
 6. ALL CLEANOUTS SHALL BE USF 7630 SEWER VALVE & COVER SERIES.
 7. ALL EXISTING VALVES SHALL BE RESTRAINED PRIOR TO ANY EXCAVATION/TIE-IN.
 8. ALL TAPPING SLEEVES SHALL BE MECHANICAL JOINT (MJ) PER CITY OF COCONUT CREEK SPECIFICATIONS.

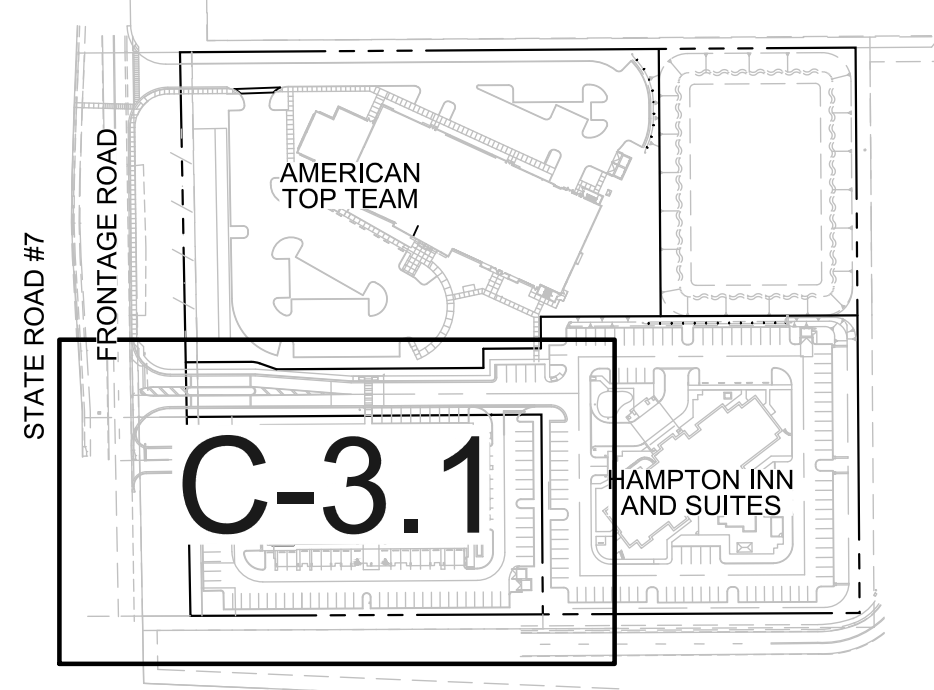

KEY MAP

anderson
architecture, inc.

399 CAMINO GARDENS BLVD.
 SUITE 202
 BOCA RATON, FLORIDA 33432
 V: 561.382.0220
 www.andersonarchitecture.com

SUN-TECH
 Sun-Tech
 Engineering, Inc.
 Engineers - Planners - Surveyors
 1800 West Oakland Park Boulevard
 Ft. Lauderdale, FL 33311
 www.suntecheng.com
 Phone: (954)777-3123
 Fax: (954)777-3114
 Certificate of Auth. # 7597

Oct 26 2016
 CLIFFORD R. LOUTAN, P.E.
 FL. REG. NO. 56890

A Site Plan Approval for:
RESIDENCE INN BY MARRIOTT
 State Road 7
 Coconut Creek, Florida

PROJECT	REVIEW
DATE	DATE
5/2/16	
14-030	
DESIGNED BY	ERIC ANDERSON
CHECKED BY	CD
DATE	DATE
3744ws.dwg	
02-23-15	
WATER & SEWER PLAN	
C-4.1	
2	C

AA 000197