

LEGEND OF EXISTING PLANT SYMBOLS:


SYMBOLS				DESCRIPTIONS
SGL.	DBL.	TRI.	MULTI.	
				EXISTING TREE/PALM TO REMAIN
				EXISTING TREE/PALM TO BE RELOCATED
				EXISTING TREE/PALM TO BE REMOVED
				EXISTING SPECIMEN TREE/PALM TO BE REMOVED
				EXISTING SHRUB/GROUND COVER AREA TO BE REMOVED
				EXISTING PLANT MATERIAL IDENTIFICATION LABEL
				TREE BARRICADE/FENCING
				ROOT PRUNING
				TREE/SHRUB CANOPY PRUNING

PRESERVATION NOTES:

- THE OWNER OR DESIGNATED REPRESENTATIVE SHALL VERIFY THE CONDITION AND TAG ALL MATERIAL TO BE RELOCATED OR REMOVED PRIOR TO ANY CONSTRUCTION ACTIVITY.
- PRESERVED TREES (TO REMAIN OR RELOCATE) SHALL BE BARRICADED/FENCED BEFORE AND DURING CONSTRUCTION:
 - THE GENERAL CONTRACTOR IS RESPONSIBLE FOR PRESERVING AND PROTECTING ALL EXISTING VEGETATION (INCLUDING TREES, PALMS, SHRUBS & GROUND COVERS) NOTED ON PLANS.
 - THE TEMPORARY FENCING SHOWN ON PLANS ARE APPROXIMATIONS ONLY. EXACT LOCATIONS FOR FENCING SHALL BE MADE IN THE FIELD BY THE OWNER'S REPRESENTATIVE OR TREE SPECIALIST IN ORDER TO DETERMINE THE ACTUAL DRIP LINE LOCATION FOR THE TREE(S). EXISTING GROUND ELEVATION AROUND DRIP LINES OF THE PRESERVED TREES WILL NOT BE CHANGED.
 - REFER TO "PROTECTIVE FENCING/BARRICADE DETAIL" ON SHEET L-6 FOR APPROVED METHOD(S) OF BARRICADE/FENCING AND THE DRIP LINE DEFINITION.
 - IF DURING THE COURSE OF CONSTRUCTION ANY OF THE PROTECTED VEGETATION DIES, IT SHALL BE REPLACED, AS REQUIRED BY THE LOCAL JURISDICTION, BY THE CONTRACTOR WITH EQUAL SIZE AND CALIBER. WHERE SUPPLEMENTAL LANDSCAPING INFRINGES ON THIS AREA, DISTURBANCE SHALL BE MINIMIZED.
 - COMPLETELY REMOVE BARRICADES WHEN CONSTRUCTION HAS PROGRESSED TO THE POINT THAT THEY ARE NO LONGER NEEDED AND WHEN APPROVED BY THE LANDSCAPE ARCHITECT.
- PROTECT ROOT ZONES OF ALL TREES AND PLANTS:
 - DO NOT ALLOW VEHICULAR TRAFFIC AND PARKING WITHIN THE FENCED AREA.
 - DO NOT STORE MATERIALS OR PRODUCTS NEAR TREES OR PLANTS.
 - PREVENT DUMPING OF REFUSE OR CHEMICALLY INJURIOUS MATERIALS OR LIQUIDS.
 - PREVENT PUDDLING OR CONTINUOUS RUNNING WATER.
 - CAREFULLY SUPERVISE ALL WORK TO PREVENT DAMAGE.
- ALL TREES TO BE RELOCATED SHALL BE:
 - ROOT AND CANOPY PRUNED A MINIMUM OF SIX (6) WEEKS PRIOR TO RELOCATING ACCORDING TO SOUND ARBORICULTURAL STANDARDS. PRUNING SHALL BE IN ACCORDANCE WITH A.N.S.I. STANDARDS AND THE GOVERNING AGENCIES MINIMAL STANDARDS.
 - TRIMMING AND ROOT PRUNING TO BE DONE BY A CERTIFIED ARBORIST AND LICENSED IN BROWARD COUNTY. MINIMAL REQUIRED TRIMMING SHALL BE DONE.
 - ROOT PRUNED BY HAND DIGGING ONLY. NO MECHANICAL EQUIPMENT SHALL BE USED WHICH WOULD DAMAGE THE ROOT SYSTEM (SUCH AS A BACKHOE).
 - ROOT PRUNED AND MOVED PRIOR TO INITIATING ANY CLEARING OF THE SITE. IF A TREE SPECIES HAS A DORMANT PERIOD IT SHOULD BE TRANSPLANTED DURING THIS TIME. DO NOT TRANSPLANT ANY TREES DURING PERIODS OF STRONG DRY WINTER WINDS AND/OR DURING PERIODS OF DROUGHT.
 - BRACED (SEE "STAKING DETAIL" ON "STANDARD PLANTING DETAILS" SHEET) DURING ROOT PRUNING AND UPON INSTALLATION FOR A PERIOD OF NOT LESS THAN ONE (1) YEAR AFTER RELOCATING (TRANSPLANTING).
 - RELOCATED AS TO NOT INTERFERE WITH EXISTING OR PROPOSED UTILITIES ABOVE OR BELOW GROUND. LANDSCAPE CONTRACTOR SHALL NOTIFY LANDSCAPE ARCHITECT WHERE PROPOSED LOCATIONS CONFLICT WITH EXISTING OR PROPOSED UTILITIES.
 - ADEQUATELY WATERED THREE TIMES A WEEK FOR THE SIX WEEK PERIOD, AFTER ROOT-PRUNING AND BEFORE TRANSPLANTING. THE ROOT BALL AND TRUNK SHALL BE PROTECTED DURING THE RELOCATION PROCESS, ROOT BALLS SHALL BE KEPT MOIST AT ALL TIMES.
- ALL RELOCATED/TRANSPLANTED TREES SHALL BE:
 - WATERED ON A DAILY BASIS UNTIL TREE GROWTH IS RE-ESTABLISHED. THIS SHALL INCLUDE TREE SAUCER THREE TIMES A DAY. IF POSSIBLE, MIST IRRIGATION SHOULD ALSO BE PLACED UP IN THE CANOPY OF THE TREES.
 - FERTILIZED WITH AN APPROPRIATE TYPE OF FERTILIZER MIX TO ENCOURAGE NEW ROOT GROWTH (i.e. LOW IN NITROGEN AND HIGH IN OTHER NUTRIENTS).
- CONSULT THE OWNER DESIGNATED REPRESENTATIVE OR LANDSCAPE ARCHITECT AND REMOVE AGREED-ON ROOTS AND BRANCHES WHICH INTERFERE WITH CONSTRUCTION WORK AREA PRIOR TO INITIATING SITE CLEARING.
- EMPLOY QUALIFIED TREE SPECIALIST TO REMOVE BRANCHES, AND TREAT ANY CUTS.
- ALL EXOTIC PLANTS, AS DEFINED BY THE LOCAL JURISDICTION, SHALL BE REMOVED WITHIN THE LIMIT OF WORK. A FOLLOW-UP MAINTENANCE PLAN SHALL BE IMPLEMENTED TO PREVENT RE-INVASION OF EXOTIC VEGETATION.
- COMPLETELY REMOVE BARRICADES WHEN CONSTRUCTION HAS ENDED, AND/OR WHEN APPROVED BY THE LANDSCAPE ARCHITECT.
- CONTRACTOR IS RESPONSIBLE FOR OBTAINING ANY AND ALL PERMITS FOR TREE REMOVAL/RELOCATION AS WELL AS ANY BONDS REQUIRED, FROM THE GOVERNING AGENCIES. CONTRACTOR SHALL PROVIDE FOR MITIGATION, AS REQUIRED AT NO ADDITIONAL COST TO THE OWNER, PRIOR TO CLEARING LAND AND OBTAINING A BUILDING PERMIT.
- LANDSCAPE CONTRACTOR SHALL INCLUDE IN HIS BID A WATERING CONTRACT AS PER THESE NOTES (4.g & 5.a).
- REFER TO PROPOSED PLANTING PLANS FOR ADDITIONAL REQUIREMENTS AND NOTES.

REFERENCE NOTES SCHEDULE (this sheet)

SYMBOL	EXISTING LANDSCAPE DESCRIPTION	QTY	DETAIL
	Root Pruning of Existing Trees to Preserve (Note: this linear quantity does not include the required root pruning for trees/palms to be relocated, which is considered a required part of the relocation and its included costs), see Preservation Notes for additional specifications. See planting plans for additional information.	118 lf	

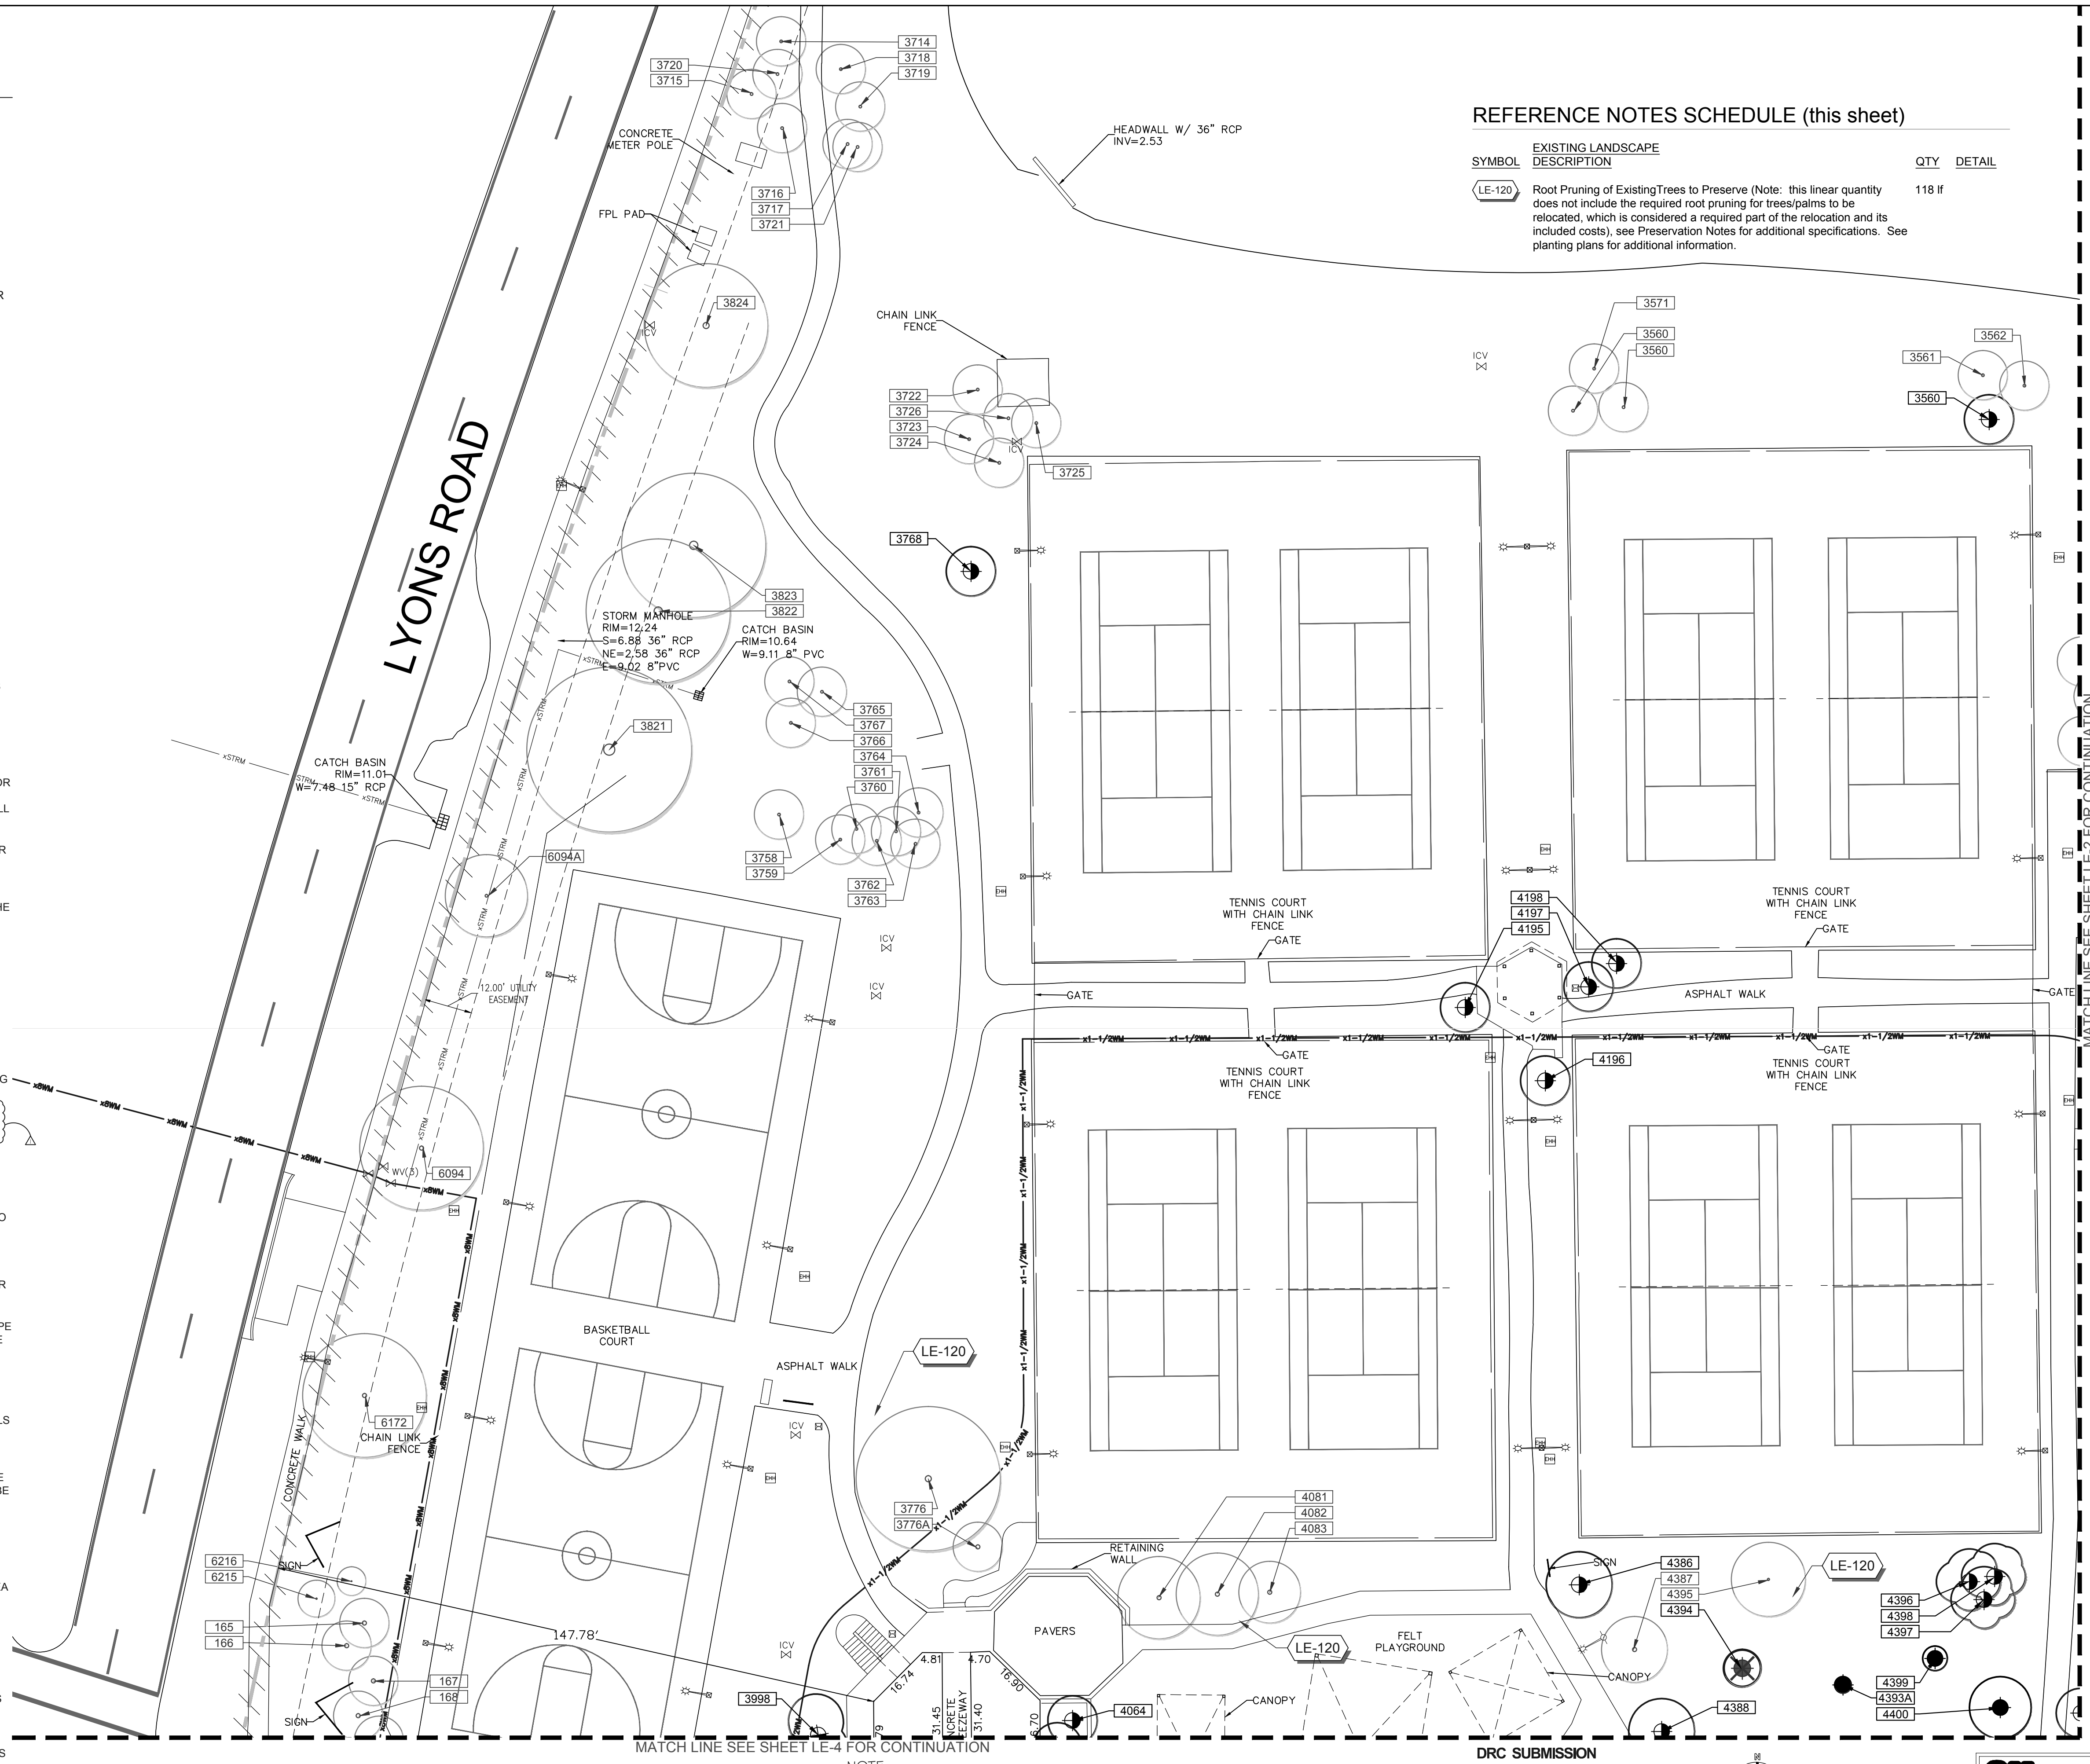


NOTE:

- ANY DAMAGE TO EXISTING TREE ROOTS GREATER THAN ONE INCH IN DIAMETER, WILL NEED TO BE EVALUATED AND TREATED BY A CERTIFIED ARBORIST AT NO ADDITIONAL COST TO THE OWNER.
- ANY EXISTING TREE OR PALM WHICH DIES DUE TO CONSTRUCTION SHALL BE REPLACED WITH SAME TYPE AND SIMILAR SIZE AT NO ADDITIONAL COST TO THE OWNER.

DRC SUBMISSION
PRELIMINARY NOT FOR CONSTRUCTION
ELEVATIONS SHOWN ARE NGVD 29
(NAVD88=NGVD29-1.565')


1 DISPOSITION PLAN
 1"= 20'-0"



SRS
SYNALOVSKI ROMANIK SAYE
 Architect - Planning - Interior Design
 1800 Eler Drive, Suite 500
 Fort Lauderdale, FL 33316
 T 954.961.6806
 F 954.961.6807
 www.synalovskid.com

TAMMY D. COOK-WOODON, R.L.A.
 STATE OF FLORIDA REGISTERED LANDSCAPE ARCHITECT
 LICENSE No. 1328

Certificate of Authorization LC00000339

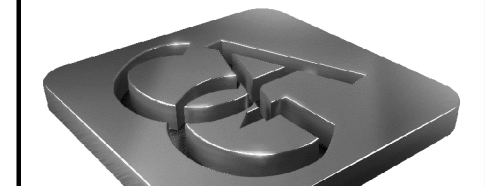

Calvin, Giordano & Associates, Inc.
 EXECUTIVE OFFICE
 1800 Eler Drive, Suite 600 Fort Lauderdale, Florida 33316
 Phone: 954.921.7701 • Fax: 954.921.8807

WINDMILL PARK
 700 LYONS ROAD
 COCONUT CREEK, FL 33063
 CLIENT: CITY OF COCONUT CREEK

REV	DATE	DESCRIPTION
1	01/12/2016	100% COMPLETION DELIVERABLE: SET

DESIGN DELIVERABLE: SET
 ISSUE DATE: 01/12/2016

PROJECT NUMBER: 1252-140622
 DRAWN BY: MM
 CHECKED BY: TCW

EXISTING PLANT MATERIAL DISPOSITION PLAN

SHEET NUMBER:
LE-1