


N.89°37'06"E.  
330.00'

PARCEL 2

N 89°37'06" E



12 UTILITY EASEMENT

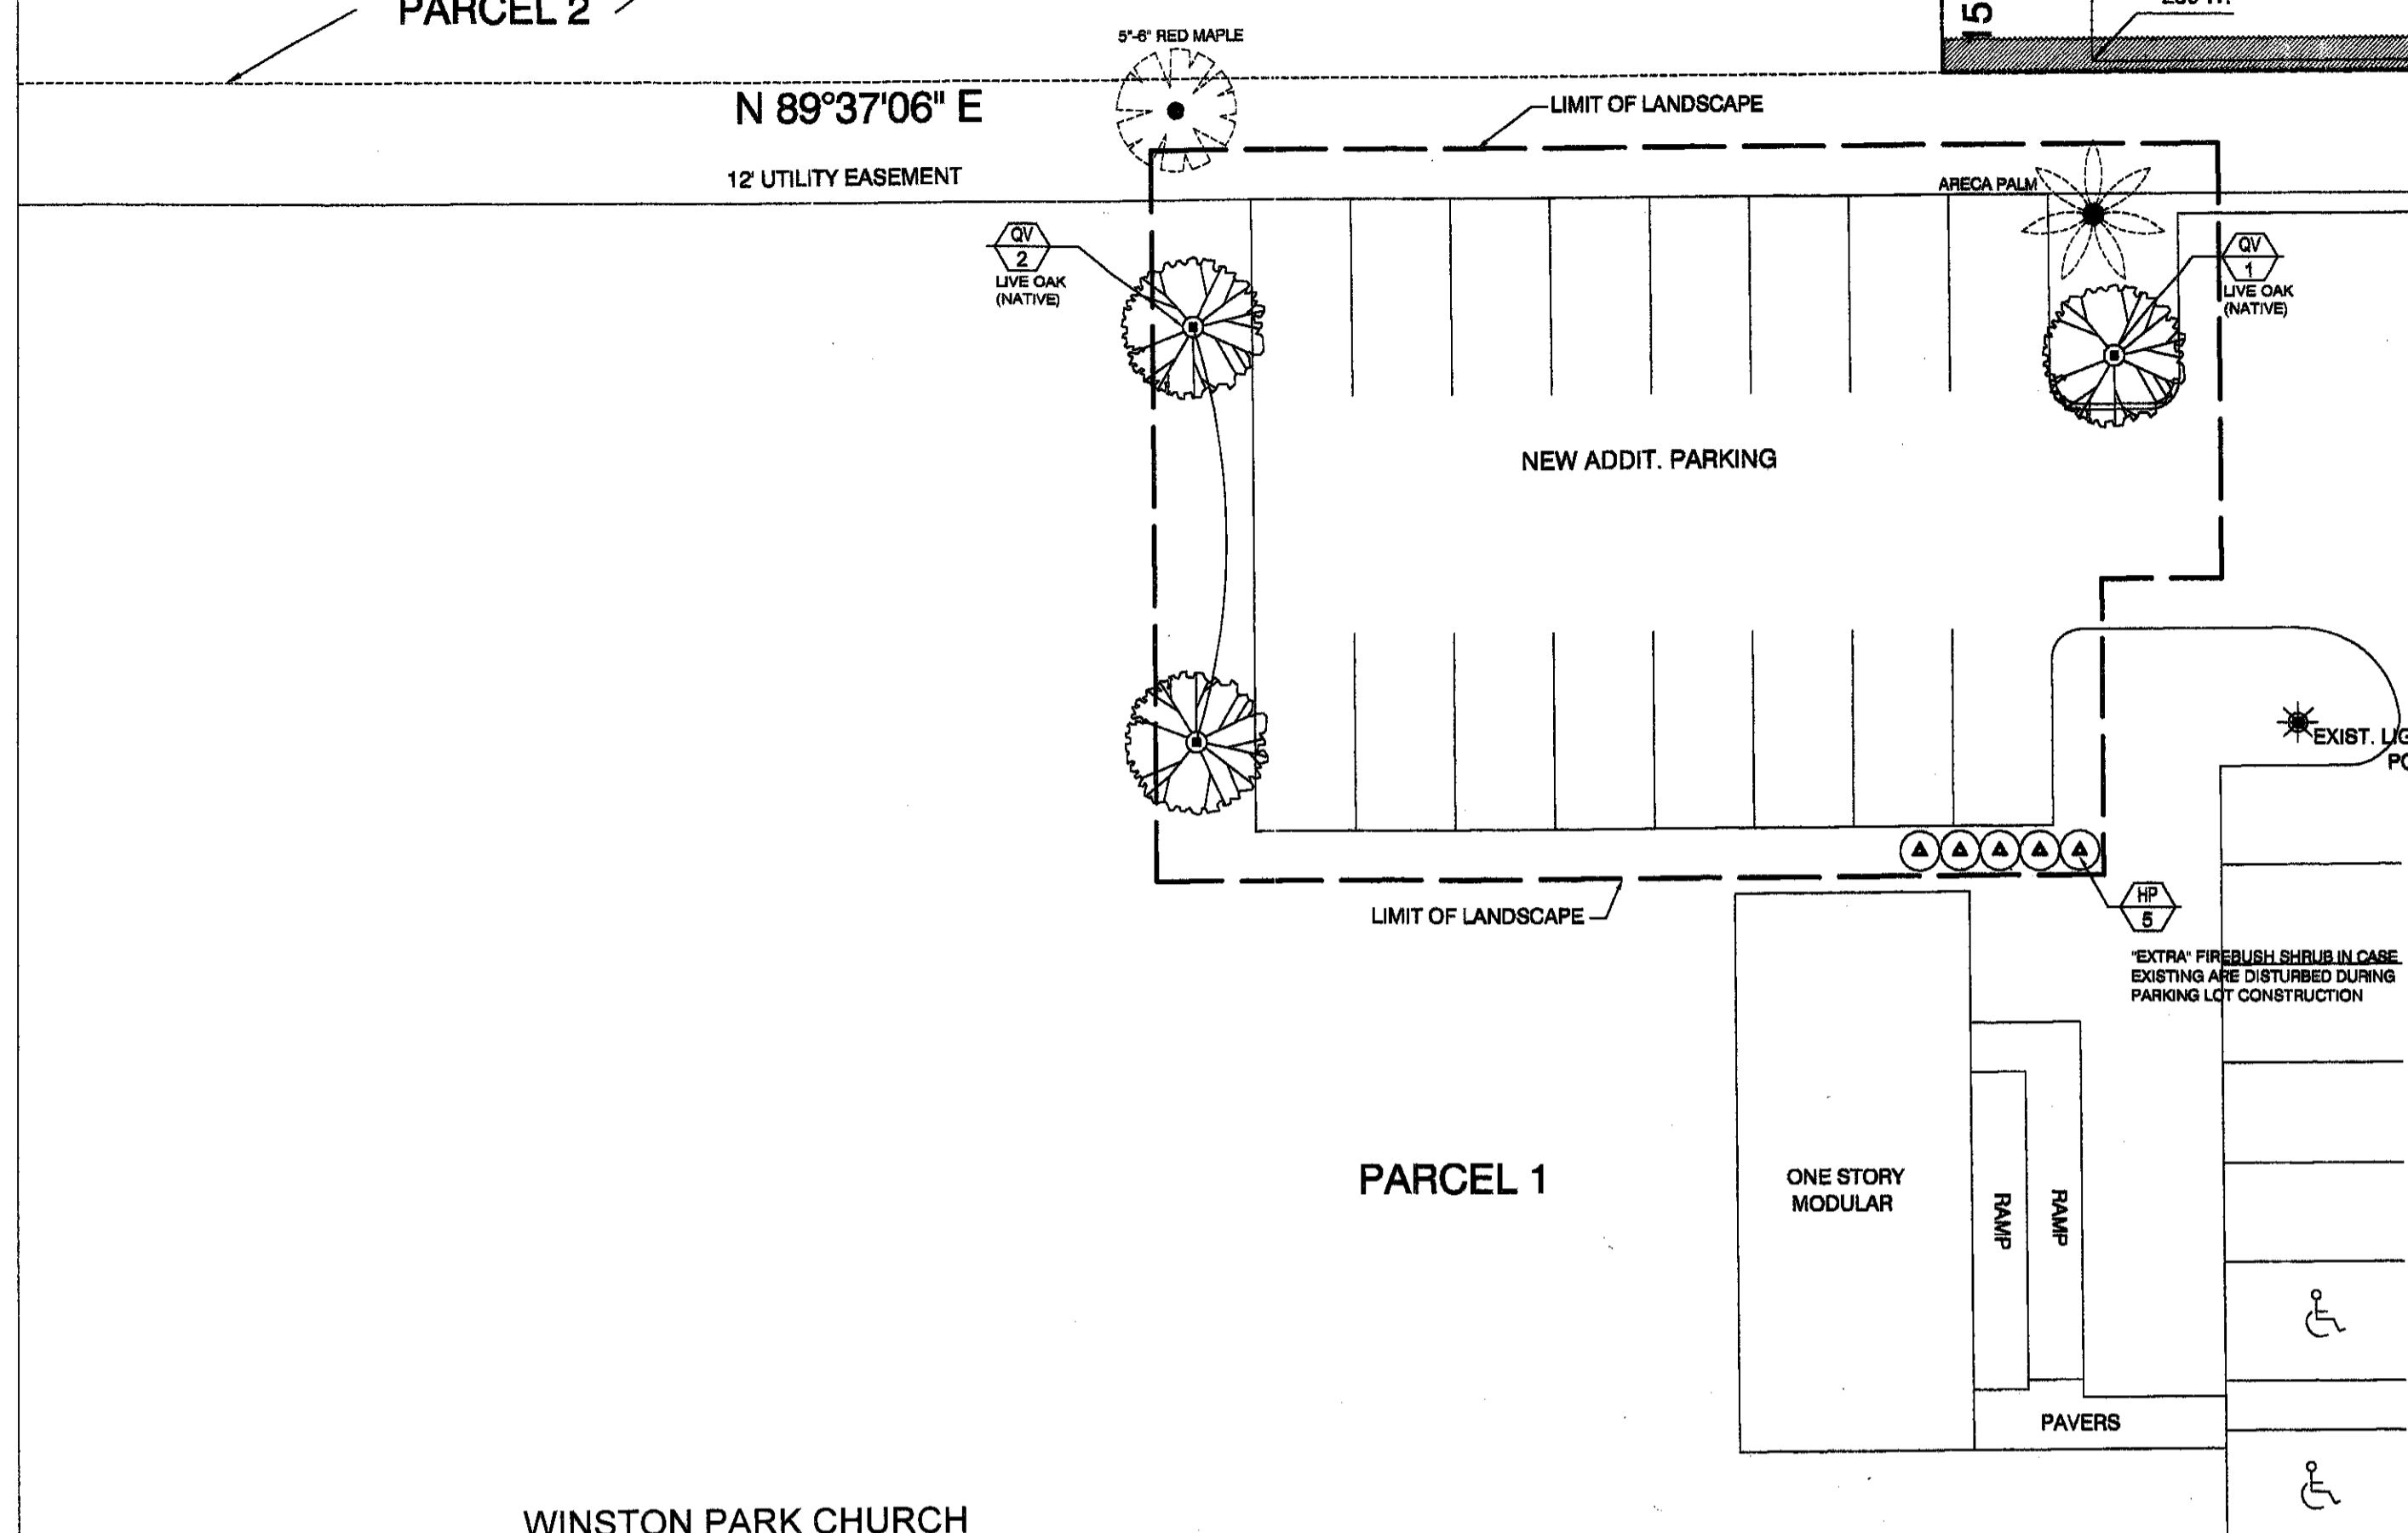

PARCEL 1

ONE STORY MODULAR

PAVERS

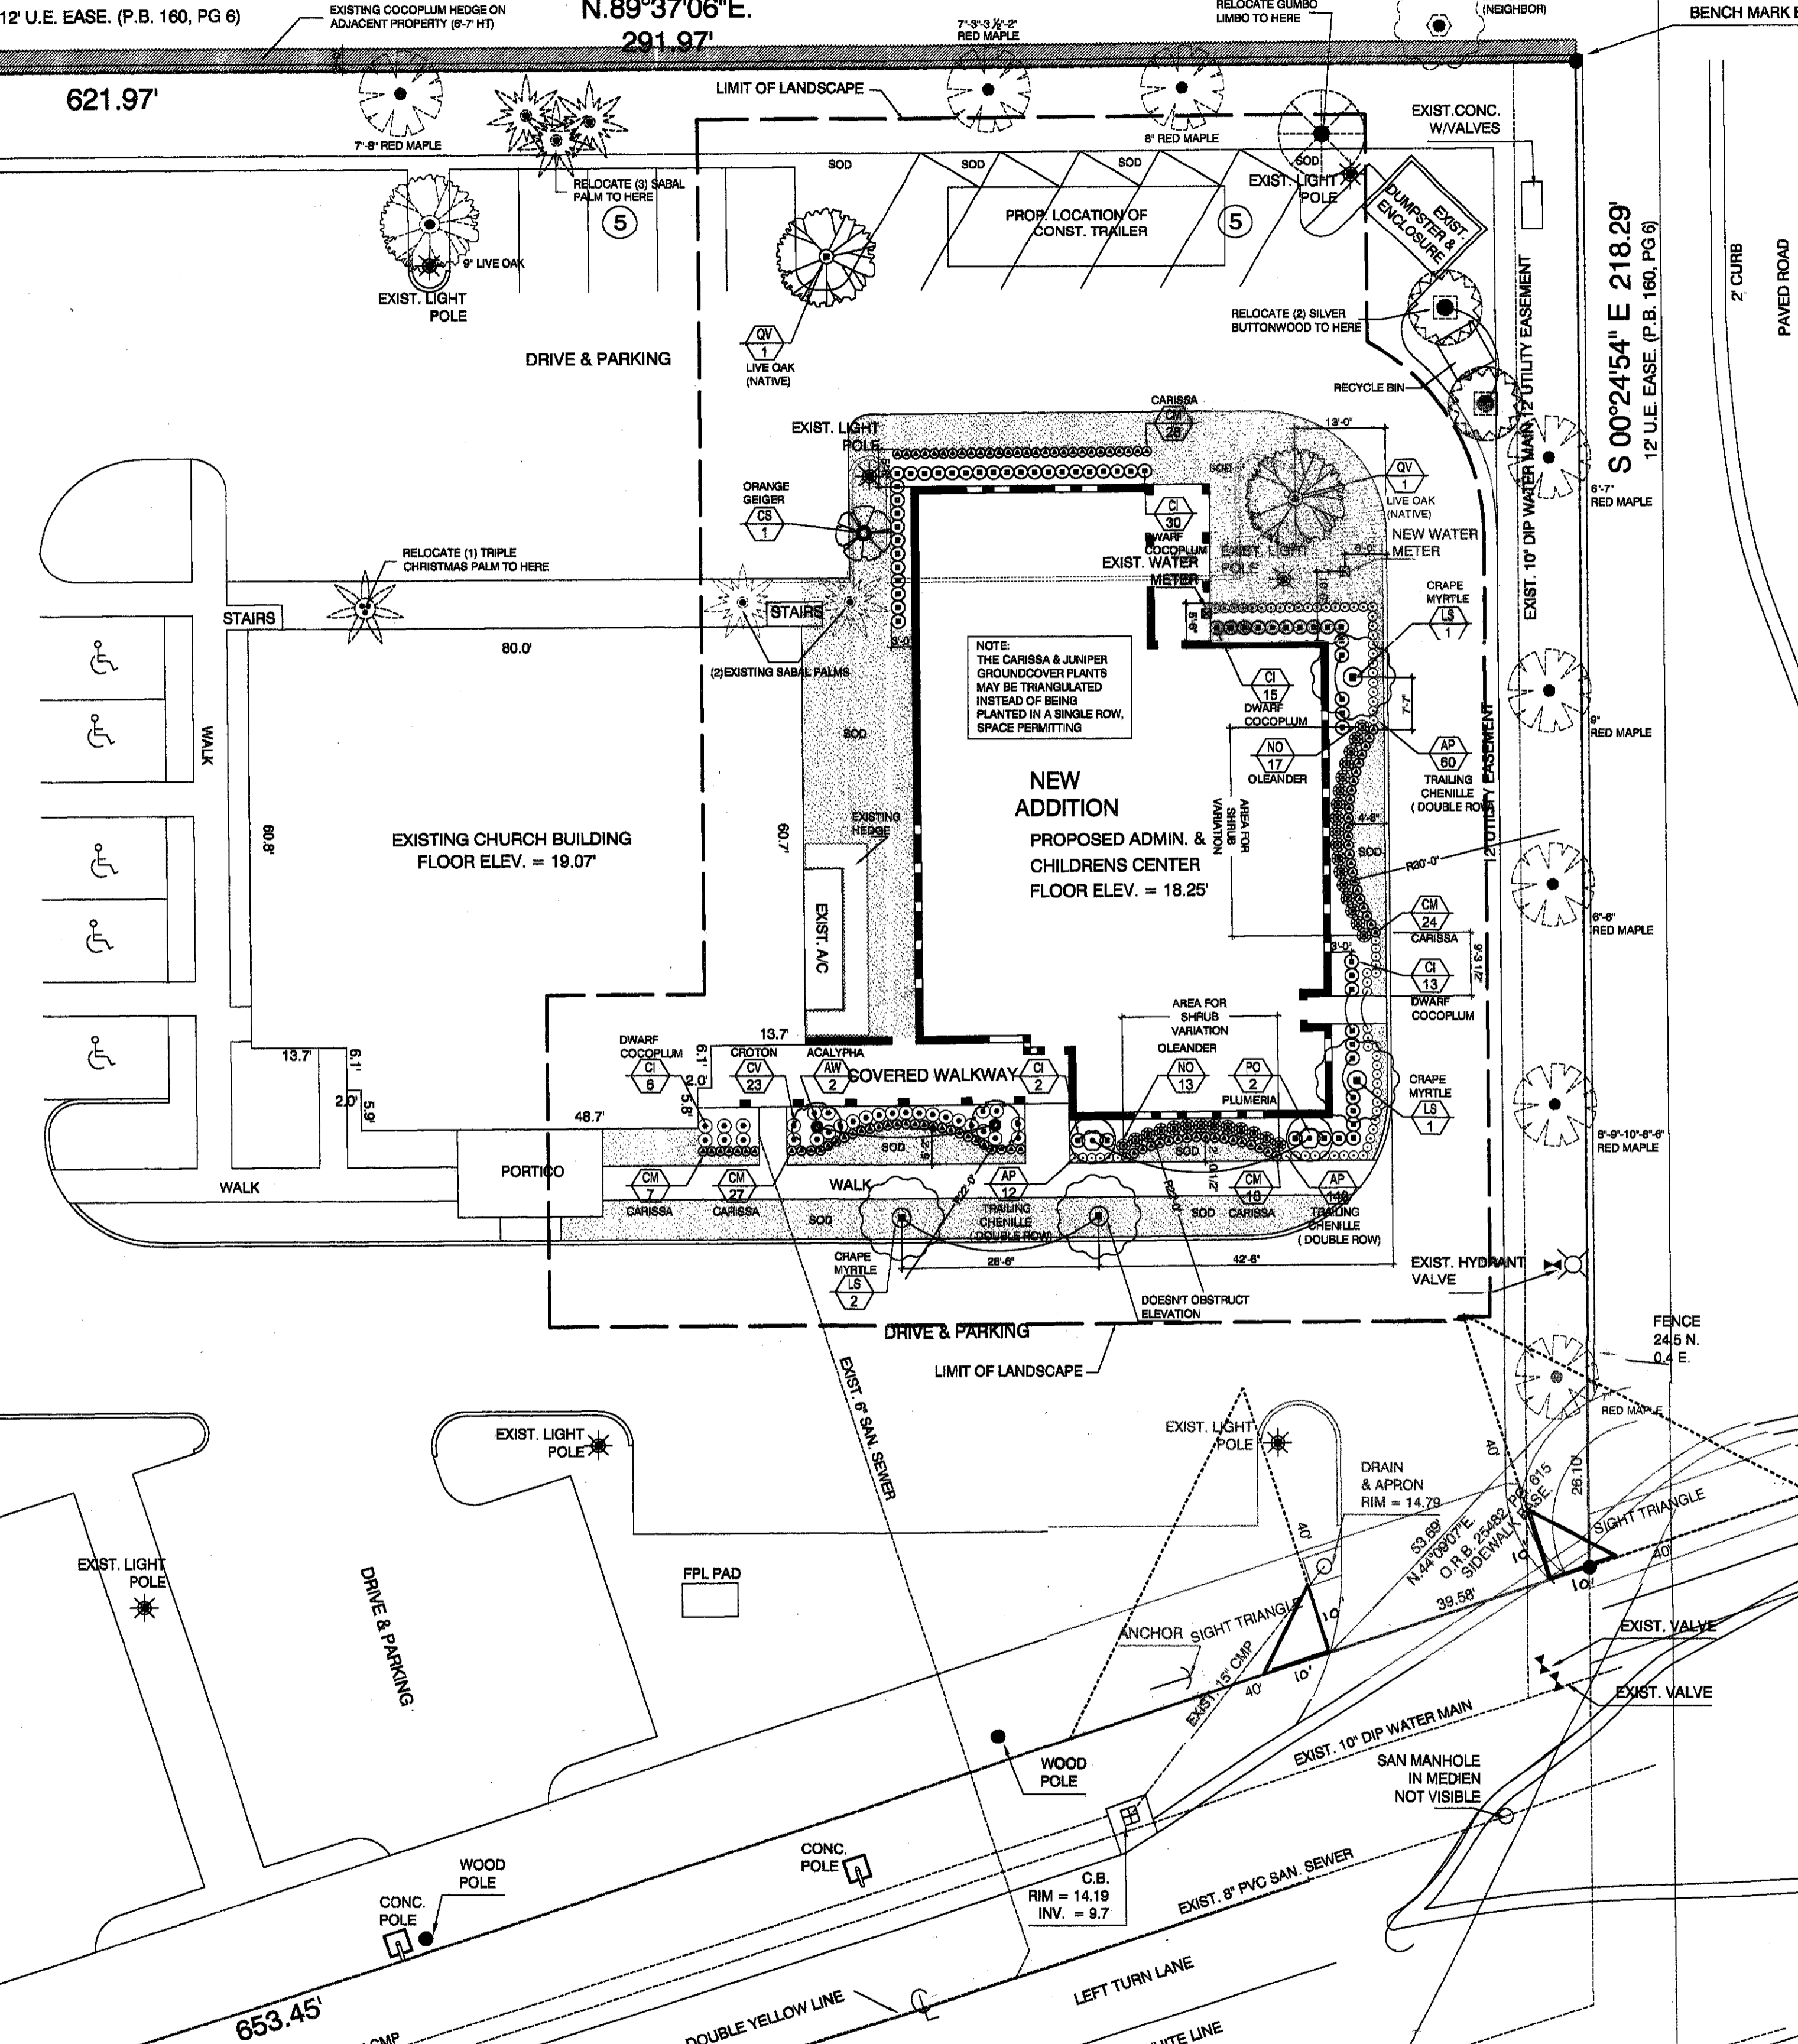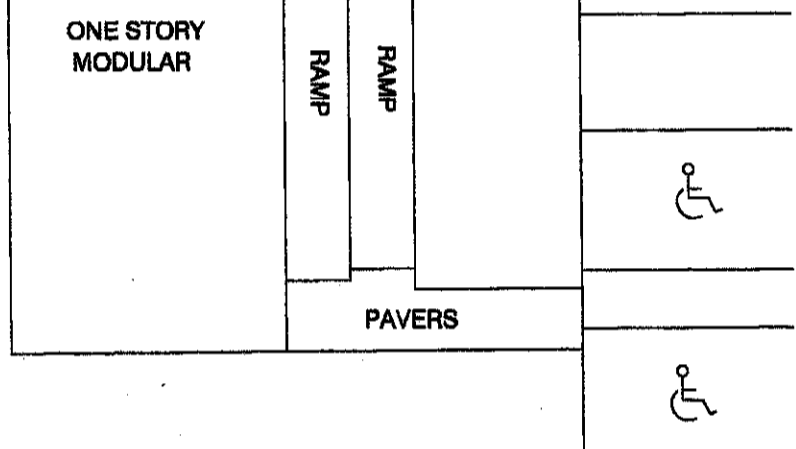

WINSTON PARK CHURCH  
PLANT LIST SUMMARY


16-Sep-11

Symbol	Quantity	Plant Name	Specifications
<b>TREES</b>			
QV	5 qty	QUERCUS VIRGINIANA Live Oak	12' height x min. 5' spread, min trunk dia. 2". Check with City of Coconut Creek whether DBH or at base of tree
CS	1 qty	CORDIA SEBESTENA Orange Geiger	12' height x min. 5' spread, min trunk dia. 2". Check with City of Coconut Creek whether DBH or at base of tree
LS	4 qty	LAGERSTROEMIA INDICA WHITE White Crape Myrtle	12' height x min. 5' spread, MULTI-TRUNK Therefore, cannot specify Min. Trunk Dia.
<b>SHRUBS &amp; GROUND COVER</b>			
PO	2 qty	PLUMERIA OBTSUSA 'Singapore' Singapore Evergreen Plumeria	4'-5" height 7 gallon
NO	30 qty	NERIUM OLEANDER PETITE PINK Petite Pink Nerium Oleander	3 gallon 20" height x 16" spread
CI	66 qty	CHRYSOBALANUS ICACO Dwarf Dwarf Cocoplum	3 gallon 16" height x 16" spread
CV	23 qty	CROTON VARIEGATA 'Mammey' Mammey Croton	3 gallon 18" height x 16" spread
AP	140 qty	ACALYPHA PENDULA Trailing Chenille	1 gallon 4'-5" height x 6" spread
CM	104 qty	CARISSA MACROPHYLLA 'Dwarf' Dwarf Carissa	3 gallon 8'-9" height x 12" spread
AW	2 qty	ACALYPHA WILKENSIANA Copper Leaf	7 gallon 36" height x 30" spread
HP	5 qty	HAMELIA PATENS Firebush	3 gallon, 18" height x 18" spread
MULCH		CYPRESS MULCH Grade A, Not Red	Grade A Cypress Mulch, not red
FERTILIZER TABLETS		SLOW RELEASE Fertilizer Tablets	1 gallon: 1 tablet 3 gallon: 3 tablets Trees and Large Shrubs: 8 tablets
SOD		ST. AUGUSTINE FLORATAM Floritam Sod	Solid, weed free, dense, well established

**RELOCATE** Location to be coordinated with City of Coconut Creek and Owner. Advance root pruning of Gumbo Limbo and Silver Buttonwood required.  
(3) Sabal Palms, relocate  
(1) Gumbo Limbo, double trunk, 4" and 2-1/2" diameter, DBH  
(1) Christmas Palm, approximately 10'-11" height overall  
(2) Silver Buttonwood (small)(2-1/2" & 3" diameter)  
NOTE: ALL TREES & PALMS RELOCATED TO THE NW CORNER OF THE PROPERTY

WINSTON  
PARK  
CHURCH

4001 NW 63rd ST.  
COCONUT CREEK  
FL 33073

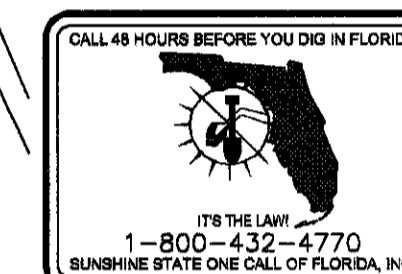

MURAKAMI  
LANDSCAPE ARCHITECTS

326 NE 1st Avenue Delray Beach, Florida 33444-3804  
407 276 7750  
FAX 561 276 7046

Response to September 9<sup>th</sup>, 2011  
DRC COMMENTS

Response to DRC Comments  
October 13, 2011

North  
Scale: 1/16"=1'-0"  
Job Number:  
Project Name:  
Drawing Name:  
Checked By:  
Date: AUGUST 16, 2011

Sheet Title  
**LANDSCAPE PLAN**

Sheet Number:

LANDSCAPE TABULATION  
BUILDING PERIMETER : 230 LINEAR FEET DIVIDED BY 40 = 5.8 FACTOR

REQUIRED TREES : 6 TREES  
REQUIRED SHRUBS : 5.8 x 20 = 116 SHRUBS  
REQUIRED GROUND COVER : 5.8 x 30 = 174 GROUND COVER : PROVIDED : 244 GROUND COVER

PROVIDED : 6 TREES

PROVIDED : 121 SHRUBS

*Handwritten signature and date: 10/21/2011*

L-1