

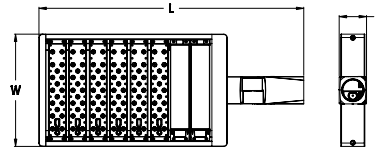
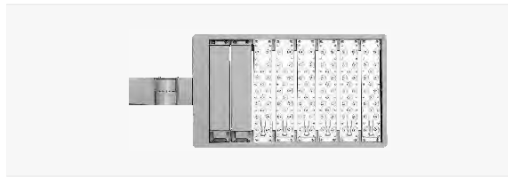


SBK Series Dimensions / Performance

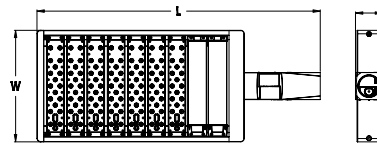



Model	SBK-180 / SBK-240 (347-480V)**	Net Weight	10.63kg(23.44lbs)
LED Modules	6	Gross Weight	11.80kg(26.01lbs)
LEDs	108	Product Dimensions	30.12"x12.99"x2.76"
EPA(sq.ft.)	0.477	Carton Dimensions	28.54"x16.34"x6.30"

Model No.	System Power	Voltage	Drive Current	Luminous Flux		Efficacy (lm/W)
				3000K	4000 /5000K	
SBK-180	172W	120-277VAC	530mA	20,898lm	23,220lm	135
SBK-240**	234W	347-480VAC**	700mA	27,378lm	30,420lm	130

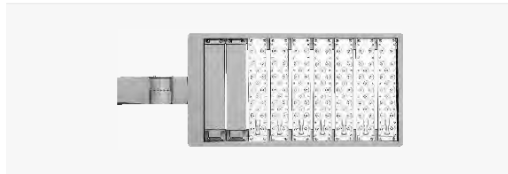



Model	SBK-210 / SBK-280 (347-480V)**	Net Weight	11.24kg(24.78lbs)
LED Modules	7	Gross Weight	12.48kg(27.51lbs)
LEDs	126	Product Dimensions	32.48"x12.99"x2.76"
EPA(sq.ft.)	0.517	Carton Dimensions	30.91"x16.34"x6.30"

Model No.	System Power	Voltage	Drive Current	Luminous Flux		Efficacy (lm/W)
				3000K	4000 /5000K	
SBK-210	202W	120-277VAC	530mA	24,543lm	27,270lm	135
SBK-280**	274W	347-480VAC**	700mA	32,058lm	35,620lm	130

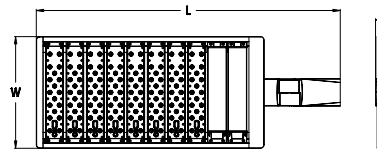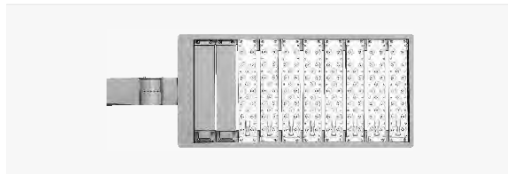



Model	SBK-240 / SBK-310 (347-480V)**	Net Weight	11.95kg(26.35lbs)
LED Modules	8	Gross Weight	13.54kg(29.85lbs)
LEDs	144	Product Dimensions	34.84"x12.99"x2.76"
EPA(sq.ft.)	0.556	Carton Dimensions	33.27"x16.34"x6.30"

Model No.	System Power	Voltage	Drive Current	Luminous Flux		Efficacy (lm/W)
				3000K	4000 /5000K	
SBK-240	228W	120-277VAC	530mA	27,702lm	30,780lm	135
SBK-310**	310W	347-480VAC**	700mA	36,270lm	40,300lm	130

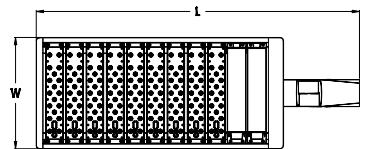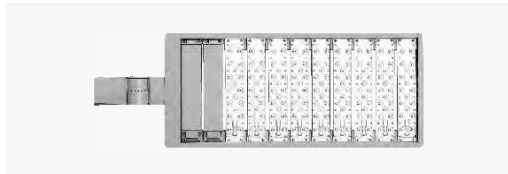

Model	SBK-270	Net Weight	12.94kg(28.53lbs)
LED Modules	9	Gross Weight	14.88kg(32.80lbs)
LEDs	162	Product Dimensions	37.20"x12.99"x2.76"
EPA(sq.ft.)	0.596	Carton Dimensions	35.63"x16.34"x6.30"

Model No.	System Power	Voltage	Drive Current	Luminous Flux		Efficacy (lm/W)
				3000K	4000 /5000K	
SBK-270	256W	120-277VAC	530mA	31,104lm	34,560lm	135

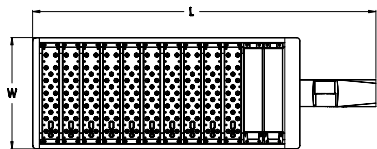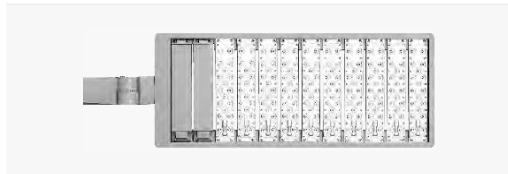

Model	SBK-300	Net Weight	13.93kg(30.71lbs)
LED Modules	10	Gross Weight	16.22kg(35.76lbs)
LEDs	180	Product Dimensions	39.57"x12.99"x2.76"
EPA(sq.ft.)	0.638	Carton Dimensions	37.99"x16.34"x6.30"

Model No.	System Power	Voltage	Drive Current	Luminous Flux		Efficacy (lm/W)
				3000K	4000 /5000K	
SBK-300	283W	120-277VAC	530mA	34,385lm	38,205lm	135